



Change Order No. 1

Date of Issuance: 7/8/2020	Effective Date:
Owner: City of Lafayette	Contractor: Rieth Riley
Engineer: HWC Engineering	Project: Lafayette Streetscape Phase III

You are hereby directed to make the following changes to the project scope of work as directed in the contract plans and specifications, reflecting subsequent additions and/or deductions to your contract amount and contract completion date: **Item # 36 Change to Str. 411 : Furnish / Install 1 EACH – Manhole, C2 in lieu of the planned : 1 EACH – Inlet, J10 ; Item # 40 Bollard Post, Alley, Install Only ; Item # 41 Bike Rack, Install Only ; Item # 42 Detectable Warning Surface, Tuftile Radial Plates ; Item # 43 Rain Garden Outlet to Storm Sewer ; Item # 44 Sanitary Work 10th St. ; Item # 45 Tree Trimming N. 10th St. ; Item # 46 Decorative Fence, SE corner 10th / Main ; Item # 47 Enlarge Fleur De Lis Logos**

CHANGE IN CONTRACT PRICE	CHANGE IN CONTRACT TIMES <i>[note changes in Milestones if applicable]</i>
Original Contract Price: \$ <u>1,723,310.70</u>	Original Contract Times: Substantial Completion <u>11/01/2020</u> Final Completion <u>12/01/2020</u> <div style="text-align: right;">days or dates</div>
[Increase] [Decrease] from previously approved Change Orders No. __ to No. __: \$ _____	[Increase] [Decrease] from previously approved Change Orders No. __ to No. __: Substantial Completion: _____ Final Completion: _____ <div style="text-align: right;">days</div>
Contract Price prior to this Change Order: \$ <u>1,723,310.70</u>	Contract Times prior to this Change Order: Substantial Completion: <u>11/01/2020</u> Final Completion: <u>12/01/2020</u> <div style="text-align: right;">days or dates</div>
{Increase} [Decrease] of this Change Order: \$ <u>23,542.00</u>	{Increase} [Decrease] of this Change Order: Substantial Completion: <u>2 Days</u> Final Completion: <u>2 Days</u> <div style="text-align: right;">days or dates</div>
Contract Price incorporating this Change Order: \$ <u>1,746,852.70</u>	Contract Times with all approved Change Orders: Substantial Completion: <u>11/03/2020</u> Final Completion: <u>12/03/2020</u> <div style="text-align: right;">days or dates</div>



Recommended:
HWC Engineering

By: _____ Ian Lesko

Ian Lesko

Approved:
City of Lafayette, IN
~~Board of Public Works & Safety~~
Redevelopment Commission

By: _____

Title: Construction Inspection Team Lead

Date: 7/08/2020

Date: _____

Accepted:
Rieth Riley

By: _____

Rieth Riley

Title: Project ~~Superintendent~~ Manager

Date: 07/16/2020

Accepted:
City of Lafayette

By: _____

Title: Economic Development Director

Date: _____

ADOPTED AND PASSED by the Lafayette Redevelopment Commission this ____ day of _____, 2020.

LAFAYETTE REDEVELOPMENT COMMISSION

Jos Holman, President

Jim Terry, Vice President

T.J. Thieme, Secretary

Don Teder

Shelly Henriott

ATTEST:

Dave Moulton



7/9/2020

Lafayette Streetscape Phase III
Change Order #1 Summary

Change Order #1 will incorporate the following changes:

Removal of Items:	# 2 Bollard Post Alley, Install	- 6 EACH	(\$5,100.00)
	# 5 Bike Rack, Install	- 8 EACH	(\$12,800.00)
	# 8 Decorative Fence, Fabricate and Install	- 64 LFT	(\$3,264.00)
Reduction of Items:	# 720-45045 Inlet , J10	- 1 EACH	(\$3,500.00)
Cost Savings :			(\$24,664.00)
Addition of Items:	# 36 Manhole, C2	1 EACH	\$4,240.00
	# 40 Bollard Post, Alley, Install Only	6 EACH	\$4,416.00
	# 41 Bike Rack, Install Only	8 EACH	\$4,800.00
	# 42 Detectable Warning Surfaces, Tuftile Radial Plates	1 LSUM	\$6,298.00
	# 43 Rain Garden Outlet to Storm Sewer	1 LSUM	\$6,830.00
	# 44 Sanitary Work 10 th St.	1 LSUM	\$12,100.00
	# 45 Tree Trimming N. 10 th St.	1 LSUM	\$1,070.00
	# 46 Decorative Fence SE Corner 10 th / Main	64 LFT	\$7,808.00
	# 47 Enlarge Fleur De Lis Logos	1 LSUM	\$644.00
Total Dollar Value of Changes:			\$48,206.00
			<u>(\$24,664.00)</u>
Total Cost of CO#1			<u>\$23,542.00</u>

Lafayette Streetscape Phase III

CLN	ITEM DESCRIPTION	UNIT PRICE	UNITS	ORIGINAL ESTIMATE		CHANGE ORDER NO. 1	
				QUANTITY	AMOUNT	QUANTITY	AMOUNT
105-06845	CONSTRUCTION ENGINEERING	\$ 34,000.00	LS	1	\$ 34,000.00		\$ -
110-01001	MOBILIZATION AND DEMOBILIZATION	\$ 85,000.00	LS	1	\$ 85,000.00		\$ -
201-52370	CLEARING RIGHT OF WAY	\$ 19,235.00	LS	1	\$ 19,235.00		\$ -
201-02245	TREE, REMOVE	\$ 1,150.00	EACH	13	\$ 14,950.00		\$ -
202-02240	PAVEMENT REMOVAL	\$ 4.50	SYS	1880	\$ 8,460.00		\$ -
202-02278	CURB, CONCRETE REMOVE	\$ 14.00	LFT	1704	\$ 23,856.00		\$ -
202-93615	CONCRETE, REMOVE	\$ 30.00	SYS	125	\$ 3,750.00		\$ -
202-52710	SIDEWALK, CONCRETE REMOVE	\$ 30.00	SYS	1536	\$ 46,080.00		\$ -
202-86946	HANDHOLE, REMOVE	\$ 400.00	EACH	2	\$ 800.00		\$ -
202-93763	LIGHT STANDARD FOUNDATION, REMOVE	\$ 1,600.00	EACH	10	\$ 16,000.00		\$ -
202-91385	INLET, REMOVE	\$ 1,200.00	EACH	2	\$ 2,400.00		\$ -
202-96328	FOUNDATION , STREET LIGHT REMOVE	\$ 600.00	EACH	10	\$ 6,000.00		\$ -
203-02000	EXCAVATION ,COMMON	\$ 60.00	CYS	1010	\$ 60,600.00		\$ -
205-06933	TEMPORARY INLET PROTECTION	\$ 270.00	EACH	24	\$ 6,480.00		\$ -
207-08264	SUBGRADE TREATMENT, TYPE II	\$ 22.00	SYS	2075	\$ 45,650.00		\$ -
211-09265	STRUCTURE BACKFILL, TYPE 2	\$ 60.00	CYS	475	\$ 28,500.00		\$ -
211-09268	STRUCTURE BACKFILL, TYPE 5	\$ 140.00	CYS	31	\$ 4,340.00		\$ -
303-01180	COMPACTED AGGREGATE NO. 53	\$ 38.00	TON	1510	\$ 57,380.00		\$ -
304-07490	HMA PATCHING , TYPE B	\$ 400.00	TON	16	\$ 6,400.00		\$ -
306-08034	ASPHALT, REMOVE	\$ 5.00	SYS	1876	\$ 9,380.00		\$ -
306-11872	MILLING, PROFILE	\$ 11.00	SYS	522	\$ 5,742.00		\$ -
402-07434	HMA SURFACE, TYPE C	\$ 140.00	TON	210	\$ 29,400.00		\$ -
402-07442	HMA BASE, TYPE C	\$ 90.00	TON	470	\$ 42,300.00		\$ -
406-05520	ASPHALT FOR TACK COAT	\$ 100.00	TON	2	\$ 200.00		\$ -
502-11543	PCCP, 4 IN	\$ 70.00	SYS	334	\$ 23,380.00		\$ -
502-06627	PCCP, 6 IN	\$ 115.00	SYS	47	\$ 5,405.00		\$ -
604-06070	SIDEWALK, CONCRETE	\$ 80.00	SYS	1233	\$ 98,640.00		\$ -
604-08086	CURB RAMP, CONCRETE	\$ 225.00	SYS	143	\$ 32,175.00		\$ -
604-12083	DETECTABLE WARNIG SURFACE	\$ 175.00	SYS	34	\$ 5,950.00		\$ -
604-44251	CONCRETE , STEPS	\$ 1,400.00	CYS	4	\$ 5,600.00		\$ -
605-06140	CURB AND GUTTER, CONCRETE	\$ 39.00	LFT	1777	\$ 69,303.00		\$ -
605-96305	CURB AND GUTTER, CONCRETE, DEPRESSED	\$ 39.00	LFT	104	\$ 4,056.00		\$ -
610-08446-1	PCCP FOR APPROACHES, 6 IN (ALLEYS)	\$ 135.00	SYS	77	\$ 10,395.00		\$ -
610-08446-2	PCCP FOR APPROACHES, 9 IN (DRIVES , SIDEWALK @ DEPRESSED LOC.)	\$ 140.00	SYS	166	\$ 23,240.00		\$ -
621-98038	MULCH HARDWOOD	\$ 90.00	CYS	10	\$ 900.00		\$ -
622-05616	PLANT, CONIF.EVRG.PRST.BRD.SPRD.SEMISPRD, OVER 18 IN TO 24 IN	\$ 70.00	EACH	31	\$ 2,170.00		\$ -
622-05651	PLANT DECIDIOUS TREE, SINGLE STEM, OVER 2.5 TO 3.5 IN	\$ 480.00	EACH	26	\$ 12,480.00		\$ -
622-05654	PLANT, PERENNIAL	\$ 21.00	EACH	119	\$ 2,499.00		\$ -
622-93712	PLANT, BULBS	\$ 4.25	EACH	197	\$ 837.25		\$ -
702-03607	CORED HOLE IN CONCRETE	\$ 550.00	EACH	1	\$ 550.00		\$ -
702-90915	CONCRETE, CLASS A	\$ 850.00	CYS	5	\$ 4,250.00		\$ -
703-06028	REINFORCING BARS @ CMU WALL	\$ 0.75	LBS	107	\$ 80.25		\$ -
715-05048	PIPE, TYPE 4, CIRCULAR, 6 IN.	\$ 23.00	LFT	1576	\$ 36,248.00		\$ -
715-05149	PIPE, TYPE 2, CIRCULAR, 12 IN.	\$ 85.00	LFT	463	\$ 39,355.00		\$ -
715-05151	PIPE, TYPE 2, CIRCULAR, 15 IN.	\$ 100.00	LFT	132	\$ 13,200.00		\$ -
715-05154	PIPE, TYPE 2, CIRCULAR, 24 IN.	\$ 125.00	LFT	105	\$ 13,125.00		\$ -
715-09064	VIDEO INSPECTION FOR PIPE	\$ 7.00	LFT	700	\$ 4,900.00		\$ -
718-52610	AGGREGATE FOR UNDERDRAINS	\$ 45.00	CYS	170	\$ 7,650.00		\$ -
718-99153	GEOTEXTILES FOR UNDERDRAINS	\$ 0.01	SYS	1520	\$ 15.20		\$ -
720-44000-1	CASTING, ADJUST TO GRADE, WATER	\$ 450.00	EACH	11	\$ 4,950.00		\$ -
720-44000-2	CASTING, ADJUST TO GRADE, GAS	\$ 450.00	EACH	11	\$ 4,950.00		\$ -
720-45045	INLET, J10	\$ 3,500.00	EACH	5	\$ 17,500.00	-1.00	\$ (3,500.00)
720-45205	CATCH BASIN, A2	\$ 4,500.00	EACH	2	\$ 9,000.00		\$ -
720-45250	CATCH BASIN, K10	\$ 4,000.00	EACH	6	\$ 24,000.00		\$ -
720-45410	MANHOLE, C4	\$ 4,000.00	EACH	6	\$ 24,000.00		\$ -
720-98687	CATCH BASIN, M10	\$ 4,250.00	EACH	1	\$ 4,250.00		\$ -
732-11810	MODULAR BLOCK WALL, CMU WALL, 8 IN	\$ 8.00	SFT	104	\$ 832.00		\$ -
732-11811	MODULAR BLOCK WALL, ERECTION, CMU WALL, 8 IN	\$ 135.00	SFT	104	\$ 14,040.00		\$ -
801-06775	MAINTAINING TRAFFIC	\$ 33,000.00	LS	1	\$ 33,000.00		\$ -
802-07060	SIGN, SHEET, RELOCATE	\$ 400.00	EACH	12	\$ 4,800.00		\$ -

Lafayette Streetscape Phase III

CLN	ITEM DESCRIPTION	UNIT PRICE	UNITS	ORIGINAL ESTIMATE		CHANGE ORDER NO. 1	
				QUANTITY	AMOUNT	QUANTITY	AMOUNT
805-11813	2 IN CONDUIT	\$ 11.00	LFT	1300	\$ 14,300.00		\$ -
805-03968	1-1/4 IN CONDUIT	\$ 8.50	LFT	4600	\$ 39,100.00		\$ -
805-03968	1 IN CONDUIT	\$ 8.00	LFT	200	\$ 1,600.00		\$ -
807-02934	LIGHTING FOUNDATION, CONCRETE W/ GROUNDING, 36 IN X 36 IN X 96 IN	\$ 2,500.00	EACH	13	\$ 32,500.00		\$ -
807-03738	LIGHT POLES, INSTALL	\$ 1,000.00	EACH	14	\$ 14,000.00		\$ -
807-04671	RECEPTACLES, FABRICATE AND INSTALL	\$ 675.00	EACH	19	\$ 12,825.00		\$ -
807-78590-A	HANDHOLES 12 X 12	\$ 1,300.00	EACH	13	\$ 16,900.00		\$ -
807-78590-B	HANDHOLES 24 X 24	\$ 2,200.00	EACH	2	\$ 4,400.00		\$ -
807-86843	#3/0 WIRING	\$ 7.50	LFT	110	\$ 825.00		\$ -
807-86843	#4 WIRING	\$ 3.20	LFT	3500	\$ 11,200.00		\$ -
807-11712	#6 WIRING	\$ 2.80	LFT	2750	\$ 7,700.00		\$ -
807-95888	#8 WIRING	\$ 2.60	LFT	6500	\$ 16,900.00		\$ -
807-95889	#10 WIRING	\$ 2.40	LFT	4250	\$ 10,200.00		\$ -
807-95889	#12 WIRING	\$ 2.20	LFT	2500	\$ 5,500.00		\$ -
808-06609	PAVEMENT STRIPING	\$ 21,850.00	LS	1	\$ 21,850.00		\$ -
1	BOLLARD, REMOVE	\$ 14.00	EACH	12	\$ 168.00		\$ -
2	BOLLARD POST, ALLEY, INSTALL	\$ 850.00	EACH	6	\$ 5,100.00	-6.00	\$ (5,100.00)
3	PEA GRAVEL, STONE	\$ 375.00	CYS	5	\$ 1,875.00		\$ -
4	TREE GRATE, INSTALL	\$ 175.00	EACH	19	\$ 3,325.00		\$ -
5	BIKE RACK, INSTALL	\$ 1,600.00	EACH	8	\$ 12,800.00	-8.00	\$ (12,800.00)
6	TREE GUARD, INSTALL	\$ 3,100.00	LS	1	\$ 3,100.00		\$ -
7	PLANTER FENCE, FABRICATE AND INSTALL	\$ 200.00	LFT	87	\$ 17,400.00		\$ -
8	DECORATIVE FENCE, FABRICATE AND INSTALL	\$ 51.00	LFT	64	\$ 3,264.00	-64.00	\$ (3,264.00)
9	METAL SCREEN WALL AND GATES, FABRICATE AND INSTALL	\$ 12,000.00	LS	1	\$ 12,000.00		\$ -
10	ALUMINUM HANDRAIL	\$ 265.00	LFT	24	\$ 6,360.00		\$ -
11	STOP SIGN, DECORATIVE	\$ 1,250.00	EACH	7	\$ 8,750.00		\$ -
12	SIGN POST	\$ 60.00	LFT	92	\$ 5,520.00		\$ -
13	STRUCTURAL WORK, LIMESTONE AT 10TH & MAIN ST.	\$ 6,000.00	LS	1	\$ 6,000.00		\$ -
14	CU-STRUCTURAL SOIL	\$ 240.00	CYS	114	\$ 27,360.00		\$ -
15	PLANTING SOIL	\$ 210.00	CYS	121	\$ 25,410.00		\$ -
16	SOD	\$ 23.00	SYS	290	\$ 6,670.00		\$ -
17	SIDEWALK PROTECTION, TRIPSTOP	\$ 14.00	LFT	334	\$ 4,676.00		\$ -
18	TREE PROTECTION FENCE	\$ 9.00	LFT	343	\$ 3,087.00		\$ -
19	ROOT PRUNING	\$ 1.00	LFT	245	\$ 245.00		\$ -
21	PAVERS, RUNNING BOND, HERRINGBONE	\$ 20.00	SFT	3153	\$ 63,060.00		\$ -
22	PAVERS, VEHICULAR	\$ 22.00	SFT	420	\$ 9,240.00		\$ -
23	PAVERS, RESET	\$ 160.00	SYS	26	\$ 4,160.00		\$ -
24	PANELBOARD, INSTALL	\$ 6,000.00	EACH	1	\$ 6,000.00		\$ -
25	ELECTRICAL RACK, INSTALL	\$ 1,500.00	EACH	1	\$ 1,500.00		\$ -
26	LIGHTING CONTRACTOR & PHOTOCELL, INSTALL	\$ 1,200.00	EACH	1	\$ 1,200.00		\$ -
27	ELECTRICAL CONDUIT TRENCH	\$ 8.00	LFT	3000	\$ 24,000.00		\$ -
28	DIRECTIONAL BORING	\$ 50.00	LFT	150	\$ 7,500.00		\$ -
29	HYDRANT, NEW	\$ 6,000.00	LS	1	\$ 6,000.00		\$ -
31	WATER MAIN CONNECTION	\$ 300.00	LFT	54	\$ 16,200.00		\$ -
32	CONCRETE RESTRAINT EDGE, 7 IN DEPTH	\$ 250.00	SYS	155	\$ 38,750.00		\$ -
33	DECORATIVE CROSSWALK-TRAFFIC PATTERNS, BRICK W/ 6 IN TRANS. LINE	\$ 25.00	SFT	1351	\$ 33,775.00		\$ -
37	CONCRETE WALL, 12 IN WIDE	\$ 975.00	CYS	5	\$ 4,875.00		\$ -
38	LIMESTONE PAVERS (STRUCTURAL WORK)	\$ 50.00	SFT	100	\$ 5,000.00		\$ -
39	ROOF DRAIN	\$ 2,000.00	EACH	4	\$ 8,000.00		\$ -
33 (A)	DECORATIVE CROSSWALK-TRAFFIC PATTERNS, BRICK W/ 6 IN TRANS. LINE	\$ (25.00)	SFT	896	\$ (22,400.00)		\$ -
34	DECORATIVE CROSSWALK, DECOMARK, FLEUR DE LIS LOGO	\$ 2,000.00	EACH	4	\$ 8,000.00		\$ -
35	DECORATIVE CROSSWALK, TRAFFIC PATTERNS, FLEUR DE LIS W/ 6 IN TRANS.	\$ 34.50	SFT	896	\$ 30,912.00		\$ -
36	MANHOLE, C2	\$ 4,240.00	EACH		\$ -	1.00	\$ 4,240.00
40	BOLLARD POST, ALLEY, INSTALL ONLY	\$ 736.00	EACH		\$ -	6.00	\$ 4,416.00
41	BIKE RACK, INSTALL ONLY	\$ 600.00	EACH		\$ -	8.00	\$ 4,800.00
42	DETECTABLE WARNING SURFACE, TUFTILE RADIAL PLATES	\$ 6,298.00	LSUM			1.00	\$ 6,298.00
43	RAIN GARDEN OUTLET TO STORM SEWER	\$ 6,830.00	LSUM			1.00	\$ 6,830.00
44	SANITARY WORK 10TH ST.	\$ 12,100.00	LSUM			1.00	\$ 12,100.00
45	TREE TRIMMING N. 10TH ST.	\$ 1,070.00	LSUM			1.00	\$ 1,070.00
46	DECORATIVE FENCE, SE CORNER OF N.10TH ST. / MAIN ST.	\$ 122.00	LFT			64.00	\$ 7,808.00

Lafayette Streetscape Phase III

CLN	ITEM DESCRIPTION	UNIT PRICE	UNITS	ORIGINAL ESTIMATE		CHANGE ORDER NO. 1	
				QUANTITY	AMOUNT	QUANTITY	AMOUNT
47	ENLARGE FLEUR DE LIS LOGOS	\$ 644.00	LSUM			1.00	\$ 644.00
					\$ -		\$ -

\$ 1,723,310.70

\$ 23,542.00

ACCUM C/O

\$ 23,542.00

\$ 1,746,852.70

% of Contract

1.366%

% To Date

1.366%

Structure ID:411

Size: **24"X36"**

Station:

Job Name: Main Street Streetscape

Job Number: 17-1304

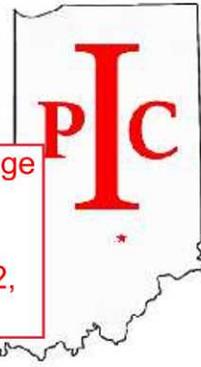
Customer: Rieth-Riley - Lafayette Indiana

Type: Storm

Rim Elev: 565.42' Overall Hgt: 7.93'

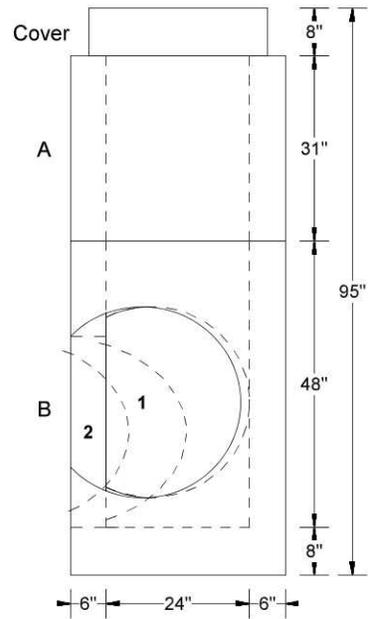
Invert Elev: 558.80' Sump: 0.64'

Rim to Invert: 6.62' Casting Hgt: 0.67'

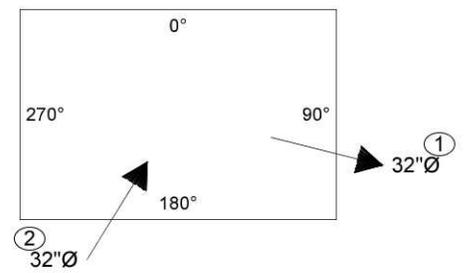


Will need to change the structure to what works. Manhole C-2, H-2, etc.

Side View



Top View



Structure constructed in accordance with ASTM C-478.

Qty	Ref	ProductID	Description	lbs	yds
1	A	024X036R	24"X36" RISER x 31.1"	2302.51	0.58
1	B	024X036IN	24"X36" INLET x 48"	3806	0.95

558.41

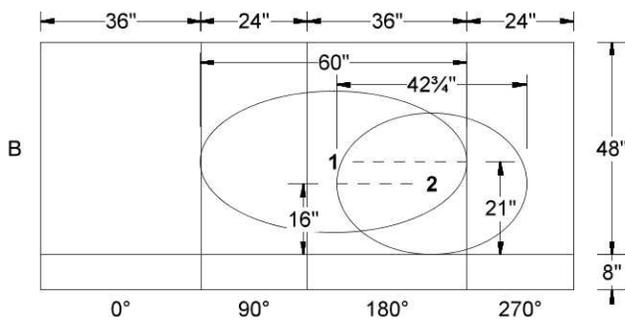
Structure Notes:

***** Structure will not work due to pipe conflict.*****

#	Elev.	Angle	Pipe	Connector	Size	Up	OverInsi de
(1)	558.8	104	24 RCP	HOLE	32	5	35
(2)	558.41	212	24 RCP	HOLE	32	0	71

558.8

Rollout View



RIETH-RILEY CONSTRUCTION Co., INC.

100% Quality • 100% Employee Owned • Over 100 Years

June 9, 2020


HWC Engineering
Attn: Ian Lesko
135 N. Pennsylvania Street, Suite 2800
Indianapolis, IN 46204

Re: Lafayette Streetscape Ph 3 – RFC #7 – Additional Tree Trimming

Attached is a price from T-N-T Tree Service to raise the canopy to 16' along the Streetscape project. This work includes trimming two ash and three linden trees and cleaning up all debris. With our mark-up, we are requesting \$1,070 for this work. Thank you.


Accepted By _____ Date 6/10/20


Cory Downs _____ Rieth-Riley


Printed Name _____ Title Director

cc: jobfile 3401032



T-N-T Tree Service, LLC

5884 Aubrey Lane
Lafayette, IN 47905

Estimate

Date	Estimate #
6/4/20	6-3001

Name / Address
Rieth Riley

			Project
Description	Qty	Rate	Total
Deadwood 2" plus, raise canopy to 16' street side and cleanup broken branches on two ash and three linden trees at 10th and ferry project		1,000.00	1,000.00
Total			\$1,000.00

We accept credit card for an additional 3.5%.



**Extra Work / Force
Account Worksheet -
Summary**

Project:	Lafayette Streetscapes Phase 3	ID#:	
Date(s):	5/29/2020	Job#:	
Item(s) of Work:	10' Fleur De Lis Logos		

109.05(b)1 - LABOR			
SUBTOTAL			\$0.00
MARKUP	20.00%		\$0.00
TOTAL LABOR			\$0.00

109.05(b)3 - MATERIAL			
SUBTOTAL			\$0.00
MARKUP	12.00%		\$0.00
TOTAL MATERIAL			\$0.00

109.05(b)4 - EQUIPMENT			
SUBTOTAL			\$0.00
MARKUP	12.00%		\$0.00
TOTAL EQUIPMENT			\$0.00

109.05 (b)6 - SUBCONTRACT			
SUBTOTAL			\$602.00
MARKUP (7% ON REMAINDER)	7.00%		\$42.14
TOTAL SUBCONTRACT			\$644.14

SUBTOTAL - w/o BONDS & INSURANCE			\$644.14
----------------------------------	--	--	-----------------

109.05 (b)2 - BONDS AND INSURANCE				
BOND - CONSTRUCTION		/ \$1,000	\$3.60	\$0.00
BOND - RESURFACE		/ \$1,000	\$2.75	\$0.00
INDIANA OCP RATE		/ \$1,000	\$0.589	\$0.00
TERRORISM PREMIUM		/ \$1,000	\$0.01	\$0.00
RAILROAD INSURANCE				\$0.00
OTHER				\$0.00
SUBTOTAL				\$0.00
MARKUP	10.00%			\$0.00
TOTAL BONDS AND INSURANCE				\$0.00

SUBTOTAL - w/ BONDS & INSURANCE			\$644.14
---------------------------------	--	--	-----------------

10' Fleur De Lis Logos	1.00	\$644.14	\$644.14
------------------------	------	----------	-----------------

Cory Downs

From: Rich Schroeder <rschroeder@globeasphalt.com>
Sent: Friday, May 22, 2020 11:11 AM
To: Cory Downs
Subject: RE: Lafayette Streetscape Ph3 - REVISIONS

**CAUTION: This email originated from outside Rieth-Riley Construction.
Do not click links or open attachments unless you recognize the sender and know the content is safe.**

- Helpdesk

Cory,

The additional costs for the 10' logos will be \$602.00.

Rich Schroeder
Globe Asphalt Paving, Inc.
Decorative Pavement Sales
317-568-4344 Office
317-726-7981 Mobile
rschroeder@globeasphalt.com

Sent from [Mail](#) for Windows 10

From: [Cory Downs](#)
Sent: Friday, May 22, 2020 9:40 AM
To: [Rich Schroeder](#)
Cc: [Conrad Walters](#); [John Shumaker](#)
Subject: RE: Lafayette Streetscape Ph3 - REVISIONS

That's not a problem. Will there be an additional cost for the up-size on the logo?

From: Rich Schroeder <rschroeder@globeasphalt.com>
Sent: Wednesday, May 20, 2020 12:47 PM
To: Cory Downs <cdowns@rieth-riley.com>
Cc: Conrad Walters <cwalters@rieth-riley.com>; John Shumaker <jshumaker@globeasphalt.com>
Subject: RE: Lafayette Streetscape Ph3 - REVISIONS

**CAUTION: This email originated from outside Rieth-Riley Construction.
Do not click links or open attachments unless you recognize the sender and know the content is safe.**

- Helpdesk

RIETH-RILEY CONSTRUCTION Co., Inc.

100% Quality • 100% Employee Owned • Over 100 Years


May 27, 2020


HWC Engineering
Attn: Ian Lesko
135 N. Pennsylvania Street, Suite 2800
Indianapolis, IN 46204

Re: Lafayette Streetscape Ph 3 - RFC #4^{4A} - Change ADA Plate materials to TuFTile

The following lump sum change is per your inquiry for changing from the fiberglass ADA plates we had bid with and changing to the TuFTile version of ADA plate. The TuFTile will be 10 gauge galvanized steel in a patina color and radius plates as designed by the TuFTile website. The total for this change is an add of \$6,298.00.


Accepted By _____ Date 6/12/20


Conrad Walters _____ 5/27/20
Rieth-Riley


Dennis Carson _____ Director
Printed Name Title

cc: jobfile 340377-
3401032

\$5,950.00 orig.
+ \$6,298.00 RFC TuFTile

\$12,248.00
÷ 34 SY

\$360.24/SY ← New Unit Price

CLW 6/12/20



RIETH-RILEY CONSTRUCTION Co., INC.

100% Quality • 100% Employee Owned • Over 100 Years


June 17, 2020


HWC Engineering
Attn: Ian Lesko
135 N. Pennsylvania Street, Suite 2800
Indianapolis, IN 46204

Re: Lafayette Streetscape Ph 3 – RFC #10 – Sanitary line up to TBIRD Alley

The following change is per your inquiry for pricing to add approximately 40 LF of 10" sanitary line up to TBird's alleyway. We have included 2 – 22-1/2 degree bends to make a turn and we will core and boot a sanitary manhole. By-Pass pumping of existing sanitary is included while we are placing the new line. The granular backfill shall be paid for using current items however we have included 12" of #53 stone to cap off the backfill. No asphalt is included at this time. The total for this work is \$12,110.00. Pricing does not include any additional MOT that is not already set up or flaggers. This work also requires 1 additional day be added to the completion date.


Accepted By _____ Date 6/17/20


Conrad Walters _____ 6/17/20
Rieth-Riley


Printed Name _____ Title Director

cc: jobfile 3401032



RIETH-RILEY CONSTRUCTION Co., Inc.

100% Quality • 100% Employee Owned • Over 100 Years


June 15, 2020


HWC Engineering
Attn: Ian Lesko
135 N. Pennsylvania Street, Suite 2800
Indianapolis, IN 46204

Re: Lafayette Streetscape Ph 3 – RFC #9 – Main Street Underdrain tie-in

The following change is per your inquiry for pricing to add approximately 33 LF of 6" storm line running from a previous phase of underdrain in a rain garden, across Main Street, and core into STR #114. New pipe will be 6" SDR35. If the pipe turns out to be larger than 6" we will need to resubmit our material pricing. This includes a 45 degree bend, a tee to stub back up into the rain garden (reusing the existing casting or top) and core. 6" of concrete is included for the road patch and then any asphalt above that shall be paid for in the existing HMA Patching price. We will do this patch at the same time as the waterline patch. The total for this work is \$6,830.00. Pricing does not include topsoil of any type for the rain garden area, plantings, granular backfill, curb, striping, signs, etc. These scopes of work shall be done with existing unit prices. We plan on doing this work when we are doing other work in the road on Main Street. No flaggers are included. This work requires that 1 additional day be added to the contract completion date.


Accepted By _____ Date 6/15/20


Conrad Walters _____ 6/15/20
Rieth-Riley


Dennis Carson _____ Director
Printed Name Title

cc: Jobfile 3401032

